


Serie -

-

Reference : 14421

Plastic site distribution board IP65 2x13 modules three-phase
63A

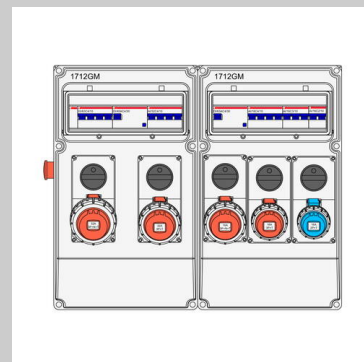

Features

Application:	Construction
Apto para instalación en exterior:	Yes
Type of installation:	Wall-mounting
Calidad del material:	ABS

Modular capacity

Capacity/Number of modules:	2x13 (26)
Number of rows:	2

Components:

Nº	Description	IP	Poles	Current (A)	Voltage (V)
1	Interlocking socket	67	2P+T	16	230
1	Interlocking socket	67	3P+T	16	400
1	Interlocking socket	67	3P+N+T	16	400
1	Interlocking socket	67	3P+T	32	400
1	Interlocking socket	67	3P+N+T	32	400
1	Emergency stop button	65	-	-	-

Protections:

Nº	Description	Curve	Rated breaking capacity (kA)	Rated residual current (mA)	Poles	Current (A)	Voltage (V)
1	MCB miniature circuit breaker	C	10	-	2P	16	230
1	MCB miniature circuit breaker	C	10	-	3P	16	400
1	MCB miniature circuit breaker	C	10	-	4P	16	400
1	MCB miniature circuit breaker	C	10	-	4P	32	400
1	RCCB residual current circuit breaker	AC	-	30	4P	63	400
1	RCCB residual current circuit breaker	AC	-	30	4P	40	400
1	General Switch (IGA)	C	10	-	4P	63	400

Technical data

Protection degree:	IP65
Resistance to impact:	IK08
Box glow wire resistance (°C):	650
Glow wire resistance in sockets (°C):	960
Double insulation:	Class II

Dimensions

Piece dimensions Height x Width x Depth (mm):	504 x 650 x 265
---	-----------------

Additional features

Emergency button:	Yes Associated with undervoltage coil
Door/window/lid type:	Transparente
Sujeción de puerta/tapa/ventana:	Screw-on
Reversible door:	No
UV protection:	Yes
Lock type:	Con tornillos
Tipo de cubierta:	Door
Versión de la cubierta:	Closed
Sealable:	Yes

Enlazable:	No
Incorpora Raíl DIN:	Yes

Materials

Materiales libres de halógenos:	Yes
Base material:	ABS
Frame material:	ABS
Door/window/lid material:	Polycarbonate (PC)
Color:	Grey RAL 7035
Door color:	Tinted

Electrical properties

Voltage (V):	230/400
Intensidad nominal (A):	63
Type of switch:	Three-phase

Certificates and regulations

Directive:	2014/35/EU
Norms:	UNE-EN 61439-1; UNE-EN 61439-4 (en los requisitos

Packaging

Suministro:	Supplied fully assembled according to the specifications of each reference, protected with shrink wrap and packed in multiple cardboard packaging according to the number of units ordered.
Type d'emballage:	BX
U.M. Embalaje - Unitario:	C62
Minimum amount of sale:	1
dimensiones_embalaje_unitario_alto_ancho_prof_m:	0.525 x 0.71 x 0.115

Codes

EAN code GETIM13:	8431044366449
Tariff code:	85371098
ETIM 8.0 Code:	EC000484
Código ETIM 9.0:	EC000484

Environmental

Fecha verificación sustancias SVHC (reach):	0000-00-00 00:00:00
Packaging:	100% recyclable cardboard

Downloads (links)

Assembly instructions:	93064
-------------------------------	-------